

Kraft Series

Electric Puller

ELECTRIC PULLER 3,300LB

Kraft means Force.

The Stärke Kraft includes German engineering and design aspects which power over the competition in strength, versatility and usability. This electric puller tug was ergonomically designed as a compact, easy to maneuver unit capable of

pulling up to 3,300 lbs across your warehouse, factory or

distribution facility.



FEATURES

Towing Capacity

• 3300 lbs

Wheels

- Front Pneumatic
- Back Rubber

Weight with Battery

• 330 lbs

Battery

- Built-in charger
- 24/80aH

Controls

- Fingertip control
- Emergency stop device
- Step-less speed control

Frame

- Compact design, built for easy
- Ergonomically designed handle
- Length 66.7"
- Width 28.4"
- Turning radius 50.8"

Powertrain/electrical

- · DC brushless motor
- Travel speed 3.4 mph unloaded, 3 mph loaded










Electric Puller

ELECTRIC PULLER 3,300LB

Kraft Series


Why Choose a Stärke Kraft over a competitor?

Puller	Stärke Kraft	Mobile TUG 15	ADS Xpress Plus 200
Tow Capacity	3,300 lbs	1,500 lbs	1,500 lbs
Drawbar Pull	300 lbs	N/A	250 lbs





Kraft Electric Puller			UTT15W
Capacity		lbs	3,300
Rated Drawbar Pull		Ν	300
Wheelbase		y (in)	15.6
Axle loading, unladen	Front	lbs	235.4
Axle loading, unladen	Rear	lbs	94.6
Tire Size	Front, pneumatic		16 x 6.5-8.00
	Rear, rubber		5.0
Wheels, number front/rear (x=drive wheels)			2x/1
Tread	Front	b10 (in)	21.9
Height of Tiller in drive position		h14 (in)	35.0
Draw Chassis height		h10 (in)	7.0 x 8.6 x 10.2
Overall length		l1 (in)	66.7
Overall width		b1 (in)	28.4
Ground clearance		m2 (in)	3.9
Turning radius		Wa (in)	50.8
Travel Speed	Laden	mph	3.0
Travel Speed	Unladen	mph	3.4
Drawbar pull	Laden/Unladen	Ν	300
Drawbar pull (max)	Laden/Unladen	Ν	1000
Brake			electric
Battery Voltage		v/Ah	24/80
Battery Weight		lbs	107.8
Battery Dimensions	LxWxH	in	10.2 × 6.7 × 8.5
Type of Drive Control			mosfet
Battery Compartment Size	in	10.6 x 7.0 x 8.9	
Service Weight with battery	lbs	330	

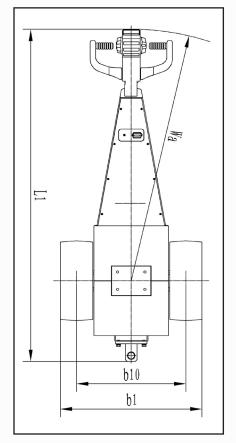



Meets or exceeds ASME B56.1 and CSA B335 Standards. Specifications are subject to change without notice.